



REZNOR[®]

THE RIGHT SPEC. RIGHT NOW.



Model R7DA

6 - 12.5 TONS

R7TQ Gas/Electric Packaged System
R7DA Gas/Electric Packaged DOAS System
P7TQ Packaged Air Conditioner

MADE FOR THOSE WHO RESPECT THE SPEC.

Reznor® light commercial packaged rooftops are highly configurable at the factory, so consultant engineers, building owners, facility managers or design-build contractors can get the configured unit they need delivered to the job site. It's the right choice for those who respect the spec.

THE RIGHT EFFICIENCY

At 12.7 IEER, Reznor light commercial packaged units meet federal minimum efficiency standards for 2018 and beyond. In addition, the package DOAS product exceeds the minimum efficiency of 5.2 ISMRE per AHRSRAE standard 90.1-2016, which puts the product ahead of many units on the market.

THE RIGHT FEATURES

Foam panel construction and hinged panel doors are standard for the unit. This type of construction increases the overall unit longevity while drastically improving indoor air quality over fiber glass insulated units. Panel walls are easy to clean and provide a super high R-value. High-quality hinges eliminate screws on the roof and keep the access doors in place, even in high wind conditions. In addition, foam panel construction reduces radiated noise into the space from the compressors and condenser fans.

THE RIGHT QUALITY

Reznor light commercial packaged units are manufactured using Demand Flow Technology (DFT), the most advanced and flexible quality-control manufacturing process in the industry. To ensure accuracy, each unit is bar-code verified to the bill-of-material components. And, our personnel test each unit for function & form as it rolls down the line.

THE RIGHT SPEC

With over 35 options per tonnage size, there are over 750,000 unit configurations available. Having the units built to spec at the factory increases product quality while lowering installation labor costs. Have a fast-track job? No problem. A 15-day, quick-ship option is available out of our factory in Dyersburg, Tennessee.

(R,P)7TQ Models



REZNOR®

MODEL R7TQ/P7TQ PACKAGE OUTDOOR AIR UNITS

Reznor® light commercial packaged rooftops are configurable for space condition needs. The standard feature provides superior benefits that increase unit longevity, lowers operational cost, lowers noise impact and increases space comfort. The factory installed options reduce field installed time providing the unit you need. While the field installed options allow maximum configurability of the unit to meet the challenging needs of your application.

Features & Benefits

CONSTRUCTION

- Base Unit Fits on Existing Carrier Curb (6 & 7.5 Tons Unit)
- 1" Foam Panel Construction: Roof, Walls & Base
- R-6.4 Insulation
- Heavy Duty Water Tight (gasket) Hinged Access Doors
- Fork Lift Access from 3 Sides

Options

- Full Unit Crating
- Flatbed and LTL crating
- 8", 14", 18" & 24" Roof Curbs (Vertical Discharge)
- Hurricane/Extreme Wind Hold Down Clips

DX SYSTEM

- High Efficiency 12.7 IEER, meets ASHRAE 90.1-2013
- R410-A Refrigerant utilizing ½ refrigerant of other system
- Lightweight All-Aluminum Evaporator & Condenser Coil
- Corrosion Proof Drain Pan
- Driers & TXV
- Easy Access Inspection & Service Doors
- Low Noise Condenser Fans

Options

- Overflow Alarm Switch
- Evaporator Coil Frost Protection
- Suction Pressure Cutout
- Low Ambient Operation (32°F)
- Coil Coating 6000 > Salt Hours
- Mesh Hail Guard
- Hood Hail Guard

HEAT SECTION

- Natural Gas, Propane & Electric Resistive Heat
- Low Medium and High Capacity
- Standard 2 Stage Gas Control
- 1" Gas Connection with side or bottom access (Matches Carrier Connections)
- Field or Factory Installed Electric Heat

Options

- Propane Conversion Kit
- High Altitude Kit
- 304 Stainless Steel Gas Heat Exchanger
- Gas Flue Hood & Extension Kit

ELECTRICAL & CONTROLS

- 208/230V, 460V & 575V Power
- Single Power Connection
- Side or Bottom Electrical Connections (Matches Carrier Connections)
- Standard Thermostat Connection with terminal connections
- Replaceable Cube Relays

Options

- Unit Mounted Disconnect
- Phase Loss Monitor
- Convenience Outlet


AIR MANAGEMENT

- Forward Curve Blower and Motor
- High Static Drive Options, > 1.0" wc E.S.P.
- Field Convertible Horizontal Supply & Return – Removal Panels replace vertical holes
- Disposable MERV 4 Filters

Options

- ECM Motor
- Smoke Detector
- Enhance Security Burglar Bars (Return & Supply Access)
- Economizer with demand control (CA Title 24 Complainant)
- 2 Position Manual & Motorized Outdoor Air Intake
- Filtered Outdoor Air Intake Hood (MERV 5)
- MERV 8 Filters (Std 62.1-2016)

R7TQ Gas/Electric

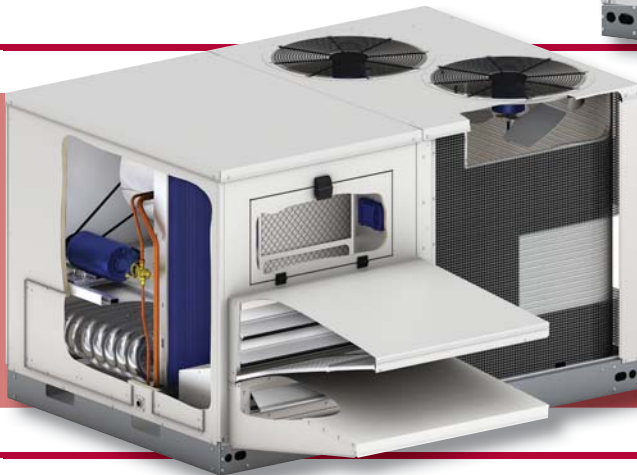

THE RIGHT UNIT FOR YOUR APPLICATION NEED

Easy To Select
Easy To Install
Easy to Service

R7TQ Gas/Electric Packaged System cutaway view back

MODEL R7DA DEDICATED OUTDOOR AIR UNIT AND HIGH OUTSIDE AIR APPLICATION

Reznor® light commercial packaged rooftops are configurable for makeup air and ventilation air applications. In addition, the units can properly handle space temperature & humidity control application with up to 50% outside air. The unique option set allows the units to be used in application beyond the capability of standard package equipment.

Features & Benefits

CONSTRUCTION

- 1" Foam Panel Construction: Roof, Walls & Base
 - R-6.4 Insulation
- Base Unit Fits on Existing Carrier Curb
- Heavy Duty Latches, Hinges & Gasketed Doors
- Fork Lift Access from 3 Sides

Options

- Full Unit crating available
- Flatbed and LTL crating available
- 18" Roof Curb – Vertical Discharge
- Hurricane Hold Down Clips

DX SYSTEM

- High Efficiency 5.2 ISMRE, meets ASHRAE 90.1-2016
- 10-100% Capacity Control – Modulating Digital Scroll
- 4 Row Coil (> 40°F ΔT capability, High Latent Performance)
- Rust Proof Drain Pan
- Lightweight All-Aluminum Condenser Coil
- R410-A Refrigerant
- High & Low Pressure Cutout Safety Switches
- Driers & TXV
- Low Noise Condenser Fans

Options

- Hot Gas Reheat with Dehumidification Control (patented)
- Low Ambient Operation (32°F)
- Coil Coating 6000 > Salt Spray Hours
- Mesh Hail Guard
- Hood Hail Guard
- Condensate Overflow Float Switch
- Evaporator Coil Frost Protection

BLOWER SECTION

- Backward Incline Plenum Fan
- Direct Drive High Efficiency ECM
- High External Static Capability (> 2.0" w.c.)
- Field Convertible Horizontal Supply & Return
- Auto & Manual Control from Unit Mounted Display

Fan Speed Controls Options

- Supply Fan Constant CFM (Direct Measurement)
- Duct Static Pressure Control (0-2.5" w.c.)
- Building Static Pressure Control (± 0.5 " w.c.)
- 2 Speed CO₂ Control (High/Low)
- 0-10V Input Signal for Fan Control "BMS Control through BacNet point"
- 2 Speed Summer/Winter
- High-Low Volume Control
- Occupied/Unoccupied Speed
- Constant Volume (User Adjustment)



REZNOR®

R7DA Features & Benefits continued

HEAT SECTION

- Natural Gas (80% Efficiency)
- 16-100% Modulated Control (6:1)
- 20-100°F temperature rise at full fire
- 1" Bottom & Side Connection
- 304 Stainless Steel

Options

- Gas Flue Hood
- High Altitude & Propane Conversion Kits
- Smoke Detector available

AIR MANAGEMENT

- 100% Outside Air Intake Damper & Control
- Outside & Return Air Intake Damper & Control
- Field Convertible Horizontal Supply & Return - Panels replace vertical holes
- Intake Damper Control
 - Economizer Title 24 Complainant
 - CO₂ Demand Control for outside air intake
 - Building Static Pressure Control ($\pm 0.5"$ w.c.)
 - External 0-10V input signal control
 - BMS control through BacNet point
 - 2 Position Control
 - 4 Position Control based upon 2 input switches
- 4" MERV 8 Filters (low pressure drop)

Options

- 4" MERV 13 Filters
- Enhance Security Burglar Bars (Return & Supply Access)
- Filter Outside Air Hood with rain baffles (MERV 5/Washable)
- Dirty Filter Indicator
- Extra Set of MERV 8 or 13 Filters


ELECTRICAL & CONTROLS

- 208/230V & 460V Single Power Connection
- Terminal Wiring Connections
- Bottom or Side Electrical Power Connections
- Standard Thermostat Connection
- Replaceable Cube Relays
- Direct Digital Control Sequence
 - Make-up Air
 - Space Temperature & Humidity Control
 - Variable Air Volume Control

Options

- Factory Install Disconnect
- Field Installed Disconnect
- Phase Loss Monitor
- Air Flow CFM Monitoring
- Convenience Outlet (Field Powered)

R7DA Packaged DOAS System

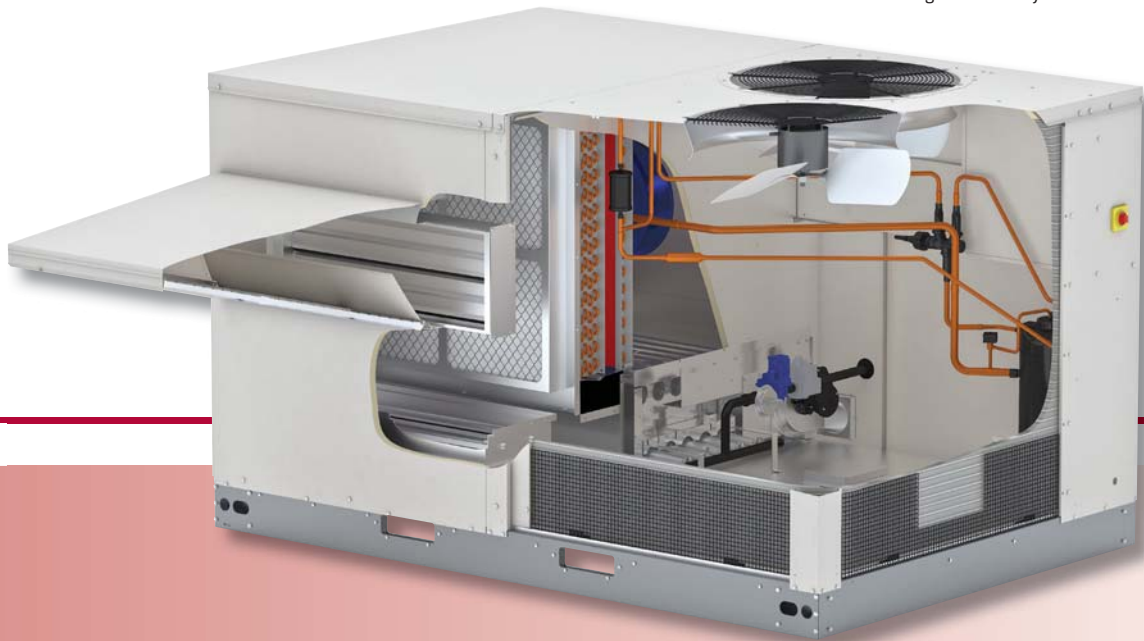

Our Safety Mission Delivers Quality & Reliability to You!



Made in Dyersburg, TN

Type	Base Model	Nominal Tons	Cooling Efficiency	Heating Capacity	Weight*	Inside Dimensions
				Gas - MBH		inches (LxWxH)
Gas/Electric DOAS	R7DA-072	6	5.2 ISMRE	100, 225	1,145	81 x 53 x 54
	R7DA-090	7.5	5.2 ISMRE	100, 225	1,182	81 x 53 x 54
	R7DA-120 2nd Qtr	10	5.2 ISMRE	TBD	TBD	81 x 53 x 64
	R7DA-150 2nd Qtr	12.5	5.2 ISMRE	TBD	TBD	81 x 53 x 64
Gas/Electric	R7TQ-072	6	12.7 IEER	110, 166	1,086	81 x 53 x 54
	R7TQ-090	7.5	12.7 IEER	166, 200, 225	1,184	81 x 53 x 54
	R7TQ-120	10	12.7 IEER	166, 200, 225	1,196	81 x 53 x 54
	R7TQ-150	12.5	12.7 IEER	166, 200, 225	1,370	81 x 53 x 64
Electric/ Electric	P7TQ-072	6	12.9 IEER	9, 18, 30, 35	1,017	81 x 53 x 54
	P7TQ-090	7.5	12.9 IEER	9, 18, 30, 35	1,141	81 x 53 x 54
	P7TQ-120	10	12.9 IEER	9, 18, 30, 35	1,155	81 x 53 x 54
	P7TQ-150	12.5	12.9 IEER	9, 18, 30, 35	1,288	81 x 53 x 64

Note: All units are arranged for 208-230/3, 460/3 and 575/3 voltage *Weight of unit will change depending on options selected

FOG...


Nice to look at – when it's outside.

Patented Hot Gas Reheat System

... avoid the fog.



HGRH option

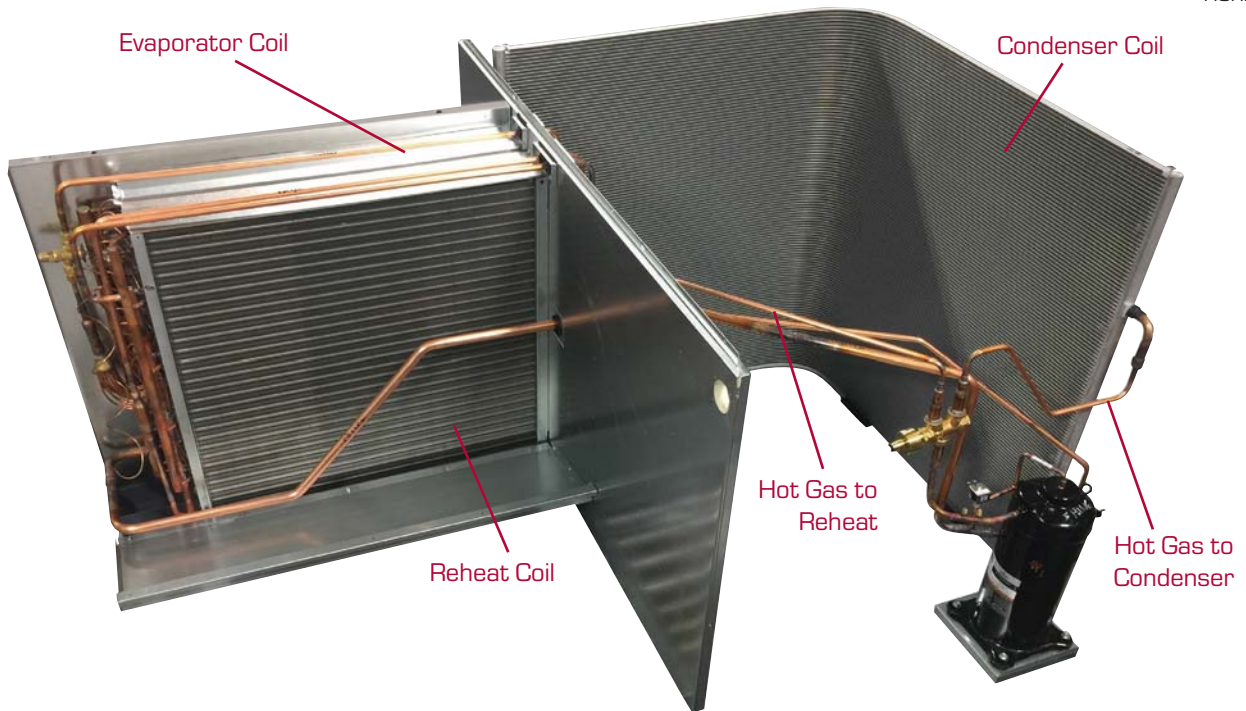

Most HGRH system performances are shown at design conditions when the demand for reheat is needed the least. It's part load condition that matters the most. The Reznor Patent HGRH avoids freezing and low capacity with smart controls and a robust mechanical design.

The chart shows a common, yet hard-to-manage control issue. In mild weather, the amount of reheat available from 100% valve control may not be enough to reach the discharge temperature setpoint. The Reznor reheat algorithm modulates the compressor to provide additional reheat capacity while maintaining proper evaporator coil control to avoid freezing.

Evaporator Coil Entering Air Condition		Leaving Air Condition from Reheat Coil		Compressor Capacity	Reheat Valve Position
db	wb	db	Dewpoint	0-100%	Open to Reheating
95°F	78°F	75.0°F	55.3°F	100%	8.8%
80°F	73°F	75.0°F	54.9°F	76.7%	17.6%
70°F	66°F	75.0°F	54.9°F	46.6%	75%
63°F	59°F	68.5°F	54.8°F	10.0%	100%
63°F	59°F	75.0°F	52.1°F	18.2%	100%

Table depicts unit function at AHRI 920 standard test conditions

REZNOR®



We Encourage Professionalism



Through Technician Certification by NATE



For complete catalog information including submittals, energy calculations, dimension drawings, and more go to ReznorHVAC.com or call 800-695-1901.

Note: In keeping with our policy of continuous product improvement, we reserve the right to alter, at any time, the design, construction, dimensions, weights, etc., of equipment information shown here.

Reznor is a registered trademark of Nortek Global HVAC, LLC. © Nortek Global HVAC, LLC 2019. All Rights Reserved. Printed in U.S.A.

690E-0119

REZNOR®